

HID INSTALLATION GUIDE


Instructions for installer/user

1. Turn power off before inspection, installation or removal
2. Turn power off if glass bulb is broken
3. Only use in closed headlight fixture rated for this product
4. Only use properly rated ballast
5. Operate lamp only in specified position
6. Do not turn on lamp until fully installed
7. Allow lamp to cool before handling.
8. Wear safety glasses and gloves when handling lamp
9. Remove and install by holding only plastic portion of the lamp
10. Do not use excessive force when installing lamp
11. Remove any fingerprints on glass envelop with alcohol before lamp 12. switched on.
12. The lamp should only fitted by a specialist
13. The used lamp should be treated as a special waste when discarded due to the use of mercury and various salts.




Installation Steps


1. At first, circumvove housing toward left, then pull out the housing apart from the cover.

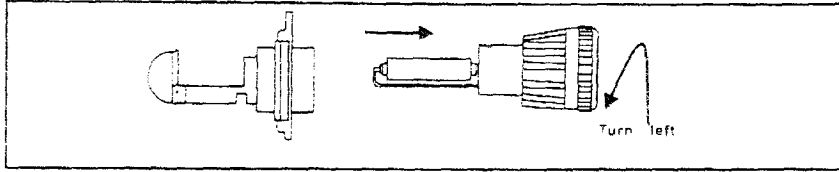


2. Wedge cover into frame of big lamp, then fix cover with spring, and cover the waterproof cover.

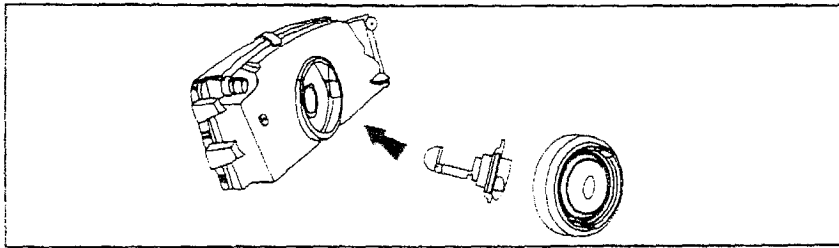


3. Insert housing into cover, and circumvove housing toward right until hearing clatter.

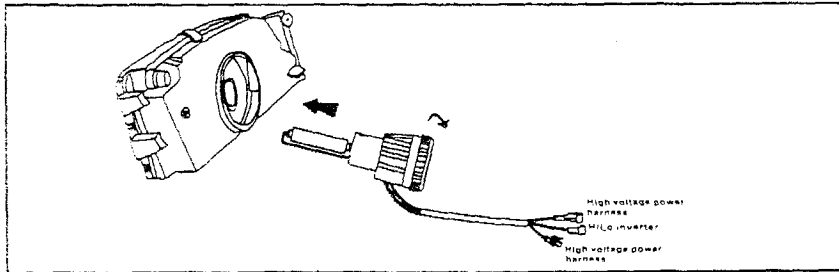


4. Turn off the power, check whether circuit is right by referring to connection.

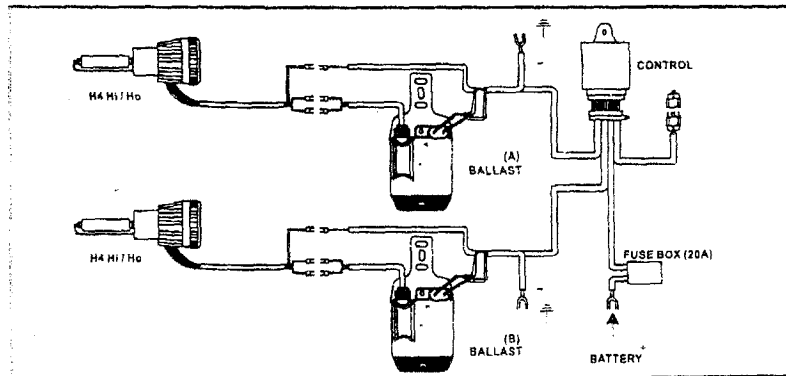

5. Turn on power, check wheter conversion between far lamp and near lamp is normal by flaring.
6. Test shade of lamp, adjust shade of big lamp with three adjustment screws of cover, made sure it is better.

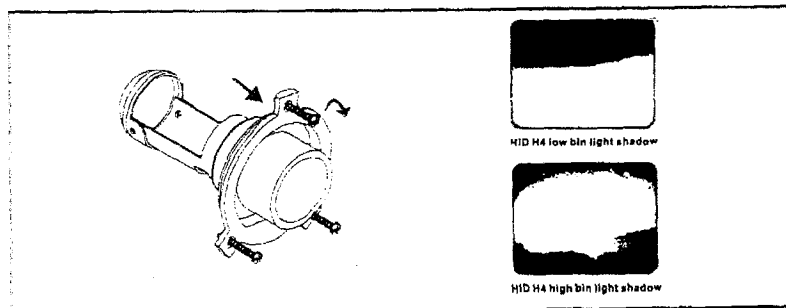

Special circuit connection solution

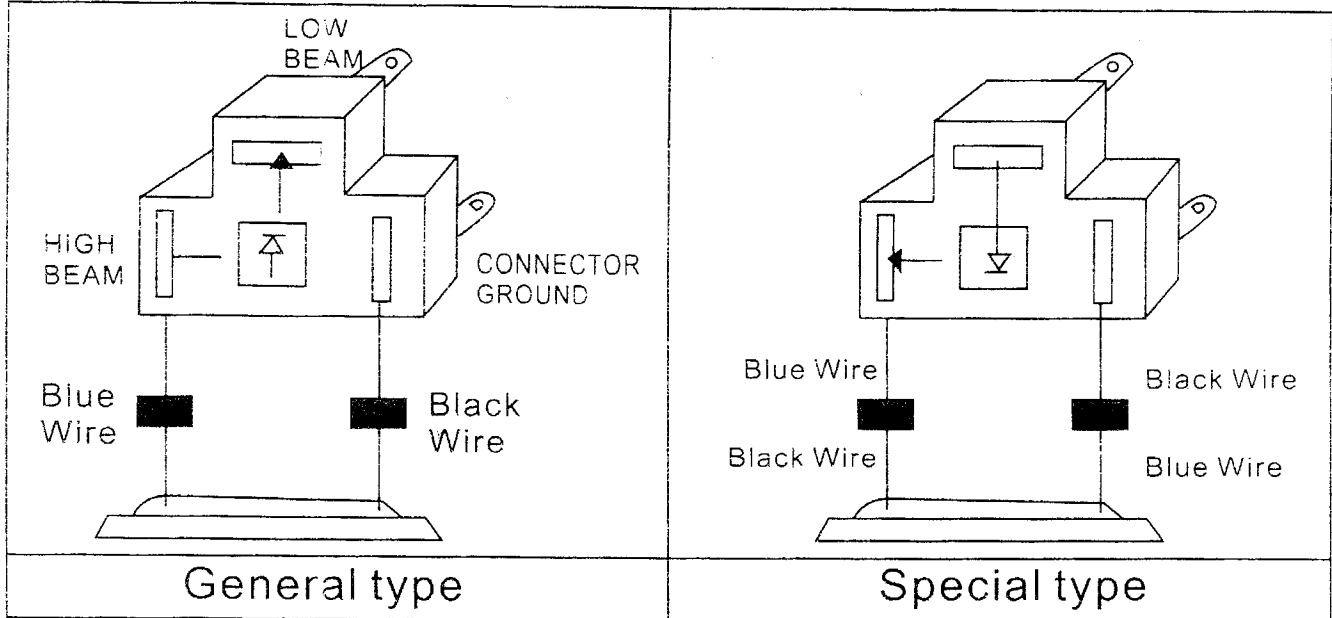

Connection change procedure

Black diode position

reverse changing

(\rightarrow | \rightarrow | \leftarrow)

White to connector cross

changing

(Blue \leftrightarrow Black)